


Removing 80033/80034 Firebox from Wood Frame

Tools Needed:

- Phillips Screwdriver

Instructions

1. Turn off fireplace, unplug fireplace from outlet, and remove the fireplace from the wall mount bracket, if not done already. Place the unit on a flat surface so that you have access to the back of the fireplace. There will be 6 screws that hold the firebox to the wood frame. Below is a picture of the location of the 6 screws.

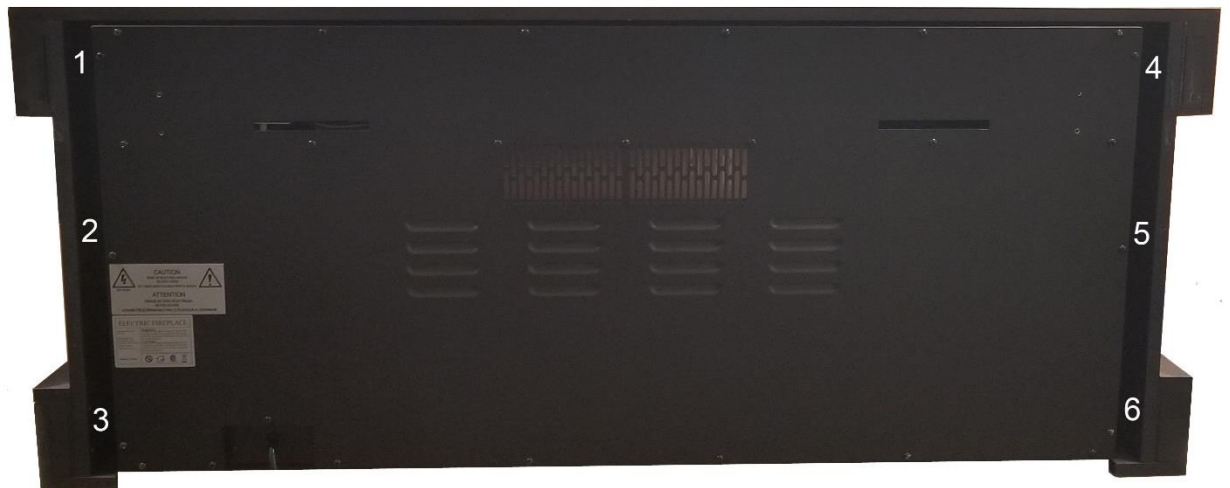

2. Remove the 3 left screws from the back of the firebox that are holding the firebox to the wood frame.



3. Remove the 3 left screws from the back of the firebox that are holding the firebox to the wood frame.



4. Once all 6 screws are removed, the wood frame will slide away from the firebox.

****If you have any questions, contact the technical support department at Touchstone Home Products at 800-215-1990 option 2.**