

Reinstalling Flame Rod in 80006 Forte Fireplace – 3-color Flames

Tools Needed


- Phillips-head Screwdriver

Instructions

1. Turn off fireplace and unplug fireplace from wall.
2. Remove fireplace from wall bracket.
3. Remove glass panel from the fireplace
4. Remove the back panel from the fireplace by removing the screws shown below.




5. Once the fireplace is open, you will have access to the flame rod. The flame rod is the long rod with silver fins on the rod. This is what creates the flame effect.

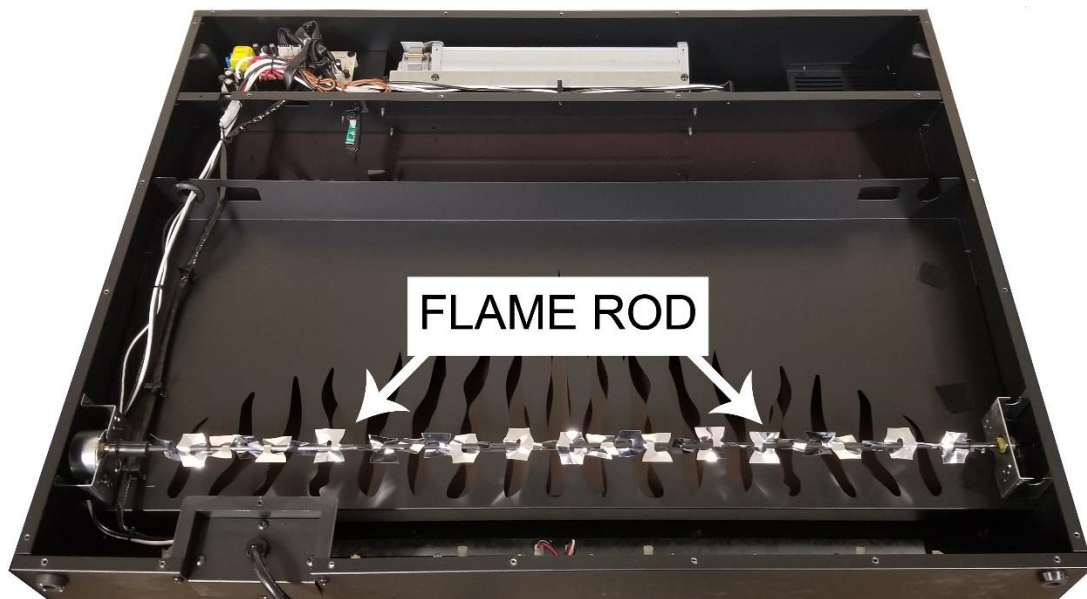

6. Inspect the flame rod to see if it is in it's holder or out of it's holder. If out of the flame rod holder, it will look like the picture below:



7. If the flame rod is out of it's holder, reinstall the flame rod in the flame rod holder by bending the flame rod and sliding it into the hole in the holder.

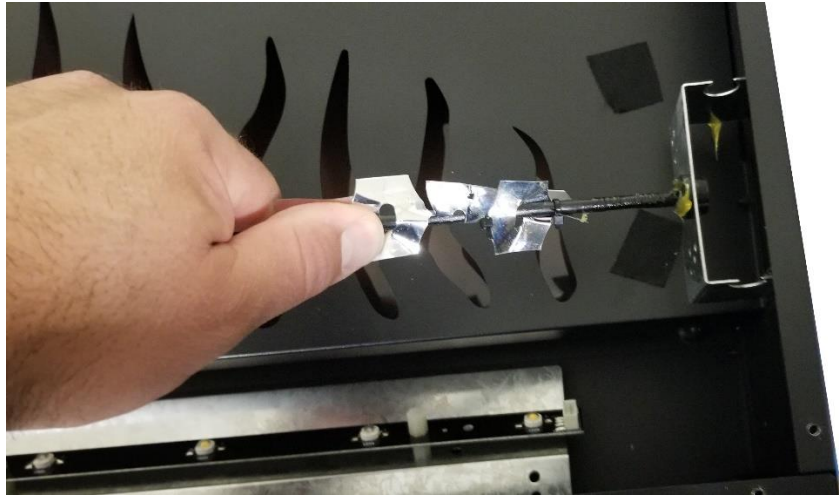

8. Once back in the holder, test the fireplace to see if the unit works as expected. If you no longer have any issues with the flame rod, reinstall the back panel and reinstall the fireplace in the wall.

****If you have any questions, contact the technical support department at Touchstone Home Products at 800-215-1990 option 3.**