

Replacing Fireplace Glass Panel

Tools Needed:


- Phillips Screwdriver

Instructions:

1. With the fireplace mounted on the wall, locate the two screws that hold the front glass panel in place and remove both screws. The white arrows point to the screws that need to be removed.



a. remove left screw

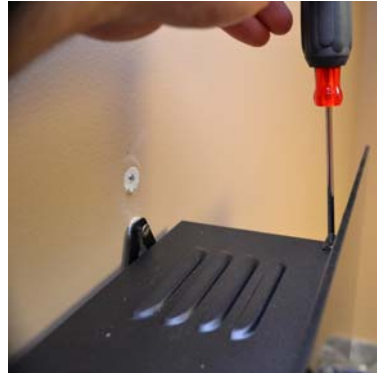

b. remove right screw

2. Carefully, lift and remove the glass panel from the front of the fireplace. The front panel hooks onto the fireplace unit. With 2 people, lift the panel toward the ceiling and then pull the panel out away from the unit. Install replacement glass .



a. lift panel up



b. pull panel away from unit

NOTE: While we show only 1 person removing the glass, we recommend that 2 people remove the glass from the fireplace unit.

****If you have any questions during the replacement of this part, please call Touchstone Home Products Technical Support at 1-800-215-1990 or 610-884-4134.**