


## Hookup Control Box and Power Supply - cont

### Install IR Sensor

If you plan to use the Whisper Lift II PRO Advanced TV Lift with an existing IR remote control, attach the IR sensor to port B on the side of the control box.



IR Sensor Cable

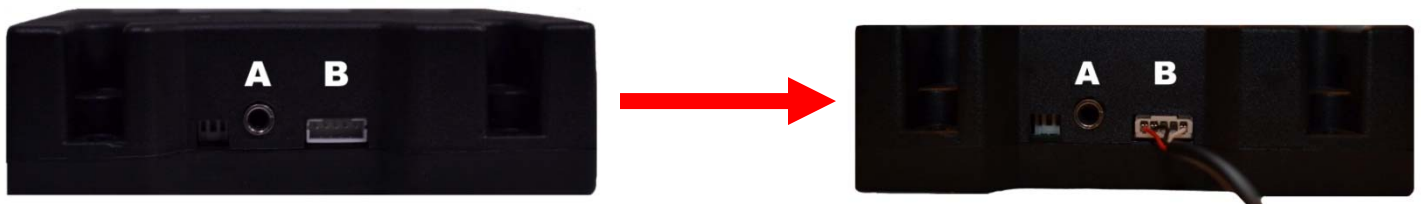

After installing the IR Sensor cable, install the IR sensor cabinet into your cabinet. Please refer to p.21 for instructions on pairing the Whisper Lift II PRO Advanced TV Lift with your existing IR remote control.

### Install 12v Trigger Cable (optional)

The Whisper Lift II PRO Advanced TV Lift comes equipped with a 12v trigger port (port A) for connection to automated systems. A male 3.5mm mono cable is required for this connection. A constant 12v 200mA setting is required from your 3<sup>rd</sup> party control system to control the lift via the 12v trigger connection.

*\*\*12v trigger cable not included.*

