


TV Lift Lubrication Grease Re-apply Instructions

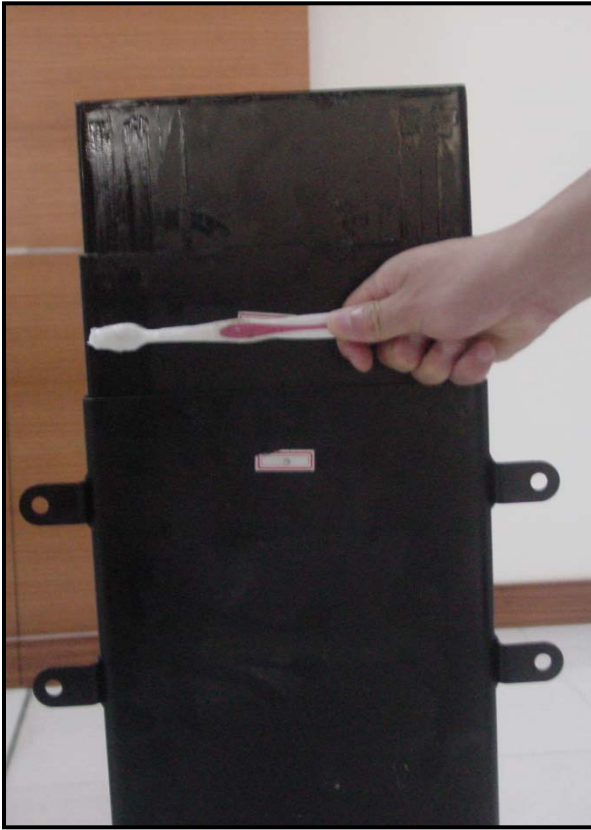

- It is advised to remove the L-bracket from the lift unit before re-applying the grease.
- Fully extends the lift unit to height position.
- Apply a thin layer of grease to the side of lift column where indicated in the figures.
- The grease has to be applied to the middle and inner column only, all sides need to be covered each column.
- Make sure you are clear from the moving parts, and then try to operate the lift up and down couple times to distribute the grease through.